


# WAFER-BT

3.5" SBC with Intel® 22nm Atom™/Celeron® on-board SoC, VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 3Gb/s, mSATA, COM, Audio and RoHS

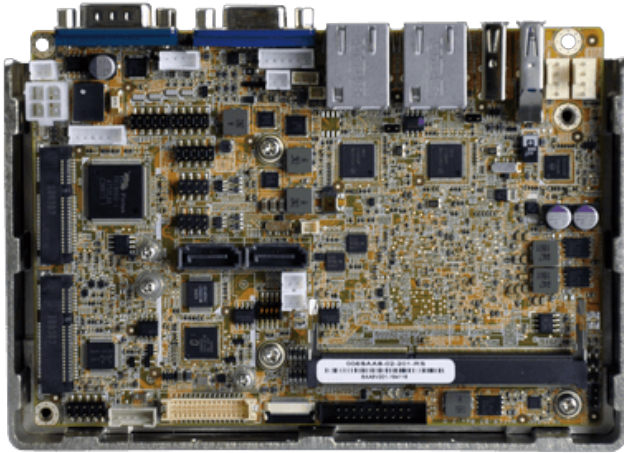

## Features

- » 3.5" SBC 支持 Intel® 22nm Atom™ 板载 SoC
- » 支持独立双显
- » 1333/1066 MHz 1.35V DDR3L SDRAM 高达 8 GB
- » 支持 COM, USB 3.0, SATA 3Gb/s, PCIe Mini, mSATA 和音频
- » IEI 一键恢复解决方案  
您可以快速创建操作系统备份和恢复

## Specifications

System	
CPU	Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W) Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W) Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W) Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W) Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W) Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
Memory	One 204-pin 1066/1333 MHz single-channel DDR3L SO-DIMM
Memory Max.	8 GB (J1900, N2930, E3845, E3827, E3826, E3825, E3815), 4 GB (N2807)
Physical Characteristics	
Dimensions (LxWxH) (mm)	146 X 102
Net Weight	250
Storage	
Storage	2 x SATA :3Gb/s with 5V SATA power connector
I/O Interface	
Display Output	1 x VGA :up to 2560x1600@60Hz 1 x LVDS :24-bit dual-channel LVDS connector (up to 1920x1200@60Hz) 1 x iDP :for HDMI, LVDS, VGA, DVI, DP (up to 2560x1600@60Hz)
Ethernet	2 x LAN :1 x Intel® I210-AT PCIe controller with NCSI support, 1 x Intel® I211-AT PCIe controller
Audio	Description: Realtek ALC662 HD codec 1 x Front Audio :2x5 pin
I/O Interface	2 x Internal RS-232 :2x5 pin, P=2.0 1 x Internal RS-422/485 :1x4 pin, P=2.0 4 x Internal USB 2.0 :2x4 pin, P=2.0 1 x PS/2 :1x6 pin
Expansion	2 x PCIe mini Card Slot :1 x Support mSATA colay with SATA port 2, 1 x except for ECO sku
Power	
Power Consumption	12V@1.45A (Intel® Celeron® J1900 with one 8 GB 1333 MHz DDR3 memory)
Power Supply	12V only DC input, 1 x internal power connector(2 x 2 pin), Support AT/ATX mode
Environment	
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C

Humidity	5% ~ 95%, non-condensing
Certifications	
Safety & EMC	CE/FCC compliant

## Ordering Information

WAFER-BT-N29301-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ N2920 1.86GHz (7.5W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio and RoHS
WAFER-BT-N28071-R20	3.5" SBC supports Intel® 22nm Dual-Core Celeron™ N2807 1.58GHz (4.5W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio and RoHS
WAFER-BT-J19001-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio and RoHS
WAFER-BT-J19001-ECO-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA, COM, Audio, ECO packing and RoHS

## Packing List

1 x WAFER-BT 单板机	1 x SATA 具有电源线套件
1 x 音频线	1 x 电源线
1 x QIG (快速安装指南)	