


HPCIE-C236

Half-size PICMG 1.3 CPU Card supports LGA1151 Intel® Xeon® E3, Core™ i3/ Pentium®/Celeron® CPU per Intel® C236

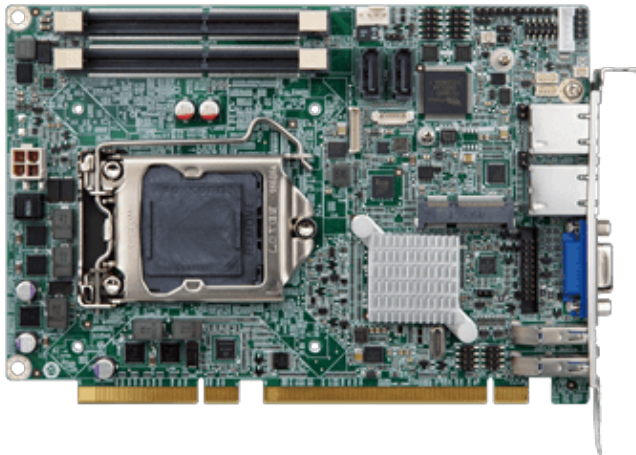

Features

- » PICMG 1.3 half-size CPU Card
- » LGA 1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor supported
- » Two 260-pin 1600/2133MHz Dual-Channel DDR4 ECC & non-ECC SODIMM supported up to 32GB
- » Supports dual independent display by VGA & internal DP pin header
- » PCIe mini Supports mSATA & USB 2.0
- » Intel® PCIe GbE with Intel® AMT 10.0 supported
- » Supports RAID 0, 1 function via SATA 6Gb/s
- » IEI jumper-less function

Specifications

System	
CPU	LGA 1151 socket supports Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor
Memory	Two 260-pin 1866/2133 MHz dual-channel DDR4 ECC and non-ECC unbuffered SODIMMs
Memory Max.	32GB
Physical Characteristics	
Dimensions (LxWxH) (mm)	169 X 126
Net Weight	420g
Storage	
Storage	2 x SATA :6Gb/s(RAID 0/1 support)
	1 x mSATA :SATA & USB signal
I/O Interface	
Display Output	1 x VGA :up to 1920x1200@60Hz
	1 x iDP :interface for HDMI™, LVDS, VGA, DVI, DP (up to 3840x2160@60Hz)
Ethernet	2 x LAN :LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 support
	LAN2: Intel® I210 PCIe controller
I/O Interface	2 x Internal RS-232/422/485 :2x5 pin, p=2.0
	2 x External USB 3.2 Gen1x1
	4 x Internal USB 2.0 :2x4 pin, p=2.0
	1 x PS/2 :1x6 pin
	1 x DIO :8-bit digital I/O (2x5 pin)
Expansion	1 x PCIe x16 :signal from CPU via golden finger
	(supports x16, or x8 + x8, or x4 + x4 + x8)
	1 x PCIe x4 :signal from Q170 via golden finger
	1 x PCIe mini Card Slot :Full-size slot (support mSATA)
Power	
Power Consumption	5V@0.13A, 12V@7.89A, 3.3V@0.10A, 5VSB@0.20A
	(Intel® Xeon® E3-1275 v5 3.60 GHz with two 16 GB 2133 MHz DDR4 memory)
Power Supply	5V/12V, Support AT/ATX mode
Environment	
Operating Temperature	-20°C ~ 60°C
Humidity	5% ~ 95%, non-condensing

Certifications	
Safety & EMC	CE/FCC compliant

Ordering Information

HPCIE-C236-R10	Half-size PICMG 1.3 CPU card supports LGA 1151 Intel® Xeon® E3, Core™ i3/Pentium®/Celeron® CPU with Intel® C236, ECC & non-ECC DDR4 SO-DIMM, VGA, iDP, Intel GbE, USB 3.0, mSATA, SATA, PCIe Mini, Intel® AMT and RoHS
----------------	--

Packing List

1 x HPCIE-C236 Single Board Computer	1 x SATA Cable
1 x QIG (Quick Installation Guide)	