


WAFER-BT

3.5" SBC with Intel® 22nm Atom™/Celeron® on-board SoC, VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 3Gb/s, mSATA, COM, Audio and RoHS

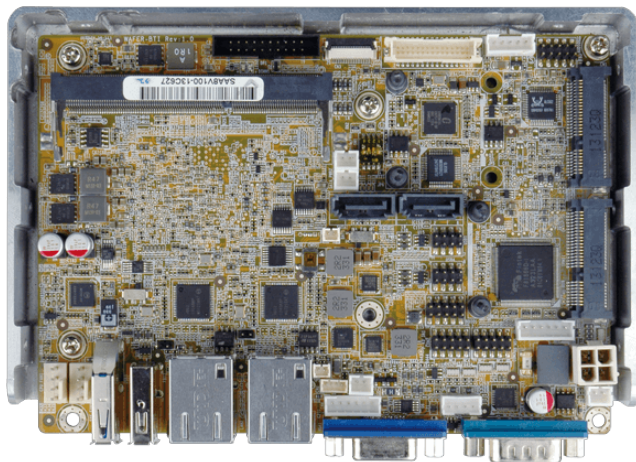

Features

- » 3.5" SBC 支持 Intel® 22nm Atom™ 板载 SoC
- » 支持独立双显
- » 1333/1066 MHz 1.35V DDR3L SDRAM 高达 8 GB
- » 支持 COM, USB 3.0, SATA 3Gb/s, PCIe Mini, mSATA 和音频
- » IEI 一键恢复解决方案
您可以快速创建操作系统备份和恢复

Specifications

系统	
CPU	Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W)
	Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W)
	Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
	Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
	Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W)
	Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
内存	One 204-pin 1066/1333 MHz single-channel DDR3L SO-DIMM
内存上限	8 GB (J1900, N2930, E3845, E3827, E3826, E3825, E3815), 4 GB (N2807)
物理特性	
尺寸 (LxWxH) (mm)	146 X 102
净重	250
存储	
存储	2 x SATA :3Gb/s with 5V SATA power connector
I/O 接口	
显示输出	1 x VGA :up to 2560x1600@60Hz
	1 x LVDS :24-bit dual-channel LVDS connector (up to 1920x1200@60Hz)
	1 x iDP :for HDMI™, LVDS, VGA, DVI, DP (up to 2560x1600@60Hz)
网络	2 x LAN :2 x PCIe GbE by Intel I210 controller
音频	描述: Realtek ALC888S HD codec
	1 x Front Audio :2x5 pin
I/O接口	2 x 内部RS-232 :2x5 pin, P=2.0
	1 x Internal RS-422/485 :1x4 pin, P=2.0
	4 x 内部 USB 2.0 :2x4 pin, P=2.0
	1 x PS/2 :1x6 pin
扩展	2 x PCIe mini Card Slot :1 x Support mSATA colay with SATA port 2, 1 x except for ECO sku
电源	
电源功耗	12V@1.45A (Intel® Celeron® J1900 with one 8 GB 1333 MHz DDR3 memory)
电源供电	12V only DC input, 1 x internal power connector(2 x 2 pin), Support AT/ATX mode
环境	
操作温度	-20°C ~ 60°C
存储温度	-30°C ~ 70°C

Humidity	5% ~ 95%, non-condensing
认证	
Safety & EMC	CE/FCC compliant

Ordering Information

WAFER-BT-N29301-R22	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ N2930 1.83GHz (7.5W)on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA , COM, Audio and RoHS
WAFER-BT-N28071-R22	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W)on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA , COM, Audio and RoHS
WAFER-BT-J19001-R22	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W)on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA , COM, Audio and RoHS
WAFER-BT-J19001-ECO-R22	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W)on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 2.0, PCIe Mini, SATA 6Gb/s, mSATA , COM, Audio and RoHS

Packing List

1 x WAFER-BT 单板机	1 x SATA 具有电源线套件
1 x 音频线	1 x 电源线
1 x QIG (快速安装指南)	